



15370 Barranca Parkway  
Irvine, CA 92618-2215  
USA

# EDGE EVO<sup>®</sup>

## Input Module

EIM-M

### INSTALLATION GUIDE

82340-901, Rev B.1

October 2011

© 2011 HID Global Corporation. All rights reserved.

Designed for interfacing to general purpose inputs typically not associated with standard access point control, the Input Module provides an interface to four input analog/digital inputs. The module is always configured as general purpose input.


## Specifications

CONDITIONS	VOLTAGE DC (VDC)	CURRENT (Amp)	OPERATING TEMPERATURE	CABLE LENGTH	UL REFERENCE NUMBER
Inputs	DC Input (NSC)	10.8 - 24VDC	0.03Amp	<b>Input Circuits</b> 500 ft (150 m) = 22 AWG • 0.65mm • 0.33mm <sup>2</sup> 18 AWG • 1.02mm • 0.82mm <sup>2</sup>  <b>Hi-O CAN Bus</b> Total Length 100 ft (30 m) - 22 AWG • 0.65mm • 0.33mm <sup>2</sup> Maximum between drops 30 ft (10 m) 22 AWG • 0.65mm • 0.33mm <sup>2</sup>	MEIMAxNN
	DC Input (MAX)	10.8 - 24VDC	0.04Amp		
	Supervised Inputs (MAX)	0 to 5VDC Reference	0.005 (Sink)		

NSC = Normal Standby Condition

**Note:** The EdgeModule Input device senses changes in other devices.

## Wiring

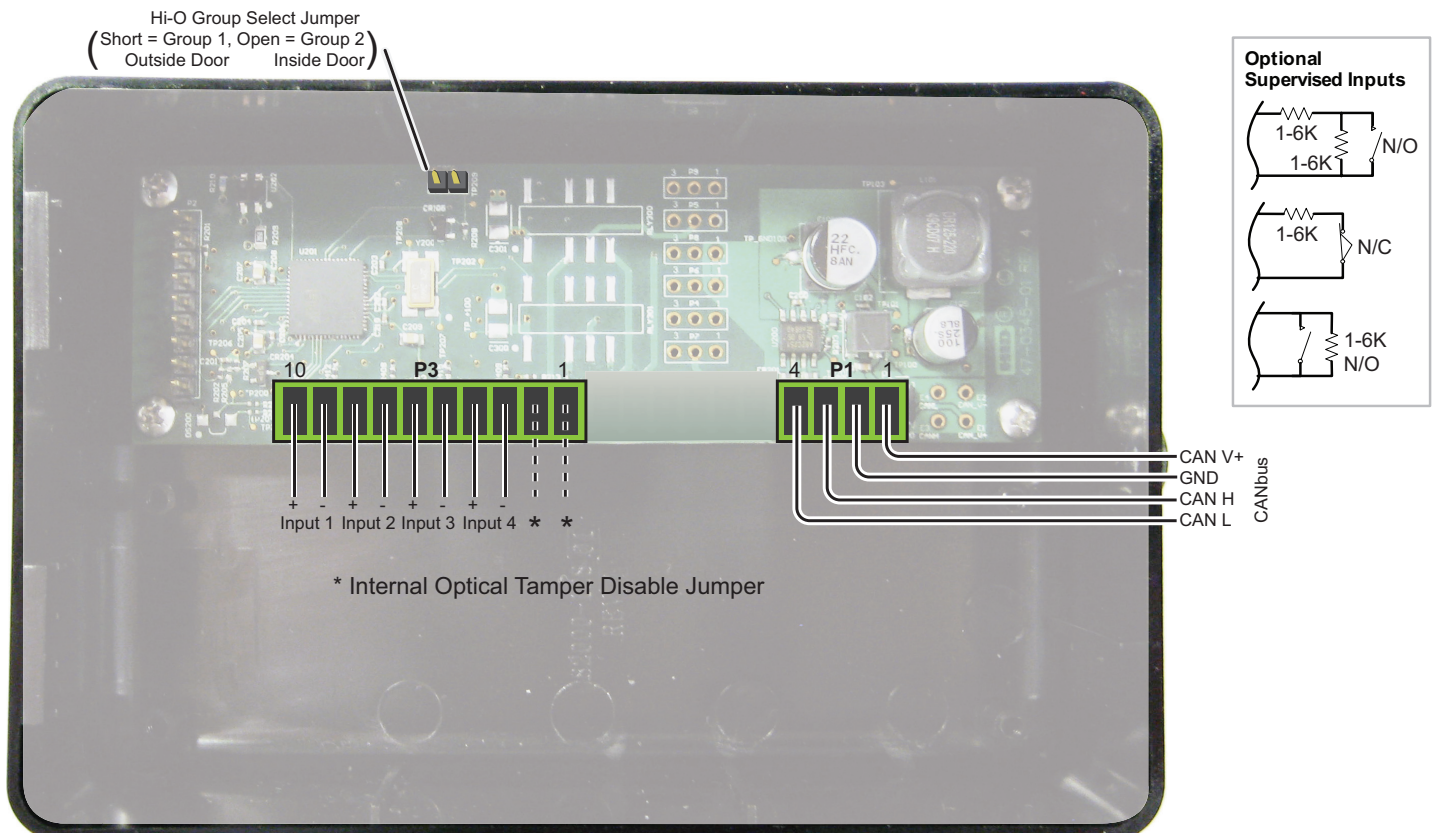

## Internal Optical Tamper

To disable the internal optical tamper sensor, attach a jumper wire from P3 pin 1 to P3 pin 2.

**Note:** If desiring an external tamper, wire an unsupervised Normally Closed contact, and replace the jumper.

# Regulatory

## UL

Connect only to a Listed Access Control / Burglary power-limited power supply, or Listed Access Control / Burglary PoE (Power-over-Ethernet) adapter. All National and local Electrical codes apply. Install in accordance with NFPA70 (NEC), Local Codes, and authorities having jurisdiction. Indoor use only.

EDGE EVO Modules are UL Listed for installation within a protected area.

Mount onto UL Listed Single-Gang electrical box.

All panic and alarm hardware and equipment shall be UL Listed.

All cabling and wire shall be UL Listed or Recognized and suitable for the application.

All splices and connections shall be mechanically secure and bonded electrically.

For operation, testing and maintenance, refer to the EDGE EVO Hi-O Networked Controller & Reader and Standard Networked Controller Installation Guide, 82000-920.

## FCC / CANADA RADIO CERTIFICATION

This device complies with part 15 of the FCC rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Le fonctionnement est soumis aux deux conditions suivantes : (1) Ce dispositif ne peut pas causer de perturbations nuisibles et (2) ce dispositif doit accepter toute perturbation quelconque qu'il reçoit, y compris des

For all models: FCC Class A ● Canada Class A ● CE Mark – Europe (EU) ● C-Tick – Australia and New Zealand ● VCCI – Japan

Class A Digital Devices - FCC Compliance Statement: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. For regulatory compliance, all connection wires must be bundled together.

## CE MARKING

HID Global hereby declares that these proximity readers are in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

The controller portion is in compliance with the essential requirements and other relevant provision of Directive 2004/108/EC.

## JAPAN MIC

この装置は認証済みです。

## TAIWAN NCC

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

According to «Administrative Regulations on Low Power Radio Waves Radiated Devices» without permission granted by the NCC, any company, enterprise, or user is not allowed to change frequency, enhance transmitting power or alter original characteristic as well as performance to an approved low power radio-frequency devices. The low power radio-frequency devices shall not influence aircraft security and interfere legal communications; If found, the user shall cease operating immediately until no interference is achieved. The said legal communications means radio communications is operated in compliance with the Telecommunications Act.

The low power radio-frequency devices must be susceptible with the interference from legal communications or ISM radio wave radiated devices.



**ACCESS** experience.

[hidglobal.com](http://hidglobal.com)

© 2009 - 2011 HID Global Corporation. All rights reserved.

82340-901 Rev B.1

Patent Pending

Check reader label for current regulatory approvals.

## HID Global

### North America

15370 Barranca Parkway  
Irvine, CA 92618  
USA  
Phone: 800 237 7769  
Fax: 949 732 2120

### Asia Pacific

19/F 625 King's Road  
NorthPoint, Island East  
Hong Kong  
Phone: 852 3160 9800  
Fax: 852 3160 4809

### Europe, Middle East & Africa

Phoenix Road  
Haverhill, Suffolk CB9 7AE  
England  
Phone: +44 1440 714 850  
Fax: +44 1440 714 840

[support.hidglobal.com](http://support.hidglobal.com)

HID GLOBAL, HID, the HID logo, EDGE EVO and Hi-O are the trademarks or registered trademarks of HID Global Corporation, or its licensors, in the U.S. and other countries.

An ASSA ABLOY Group brand

**ASSA ABLOY**